


14AWG 2 CONDUCTOR AUDIO CABLE DIRECT BURIAL (105 STRAND)

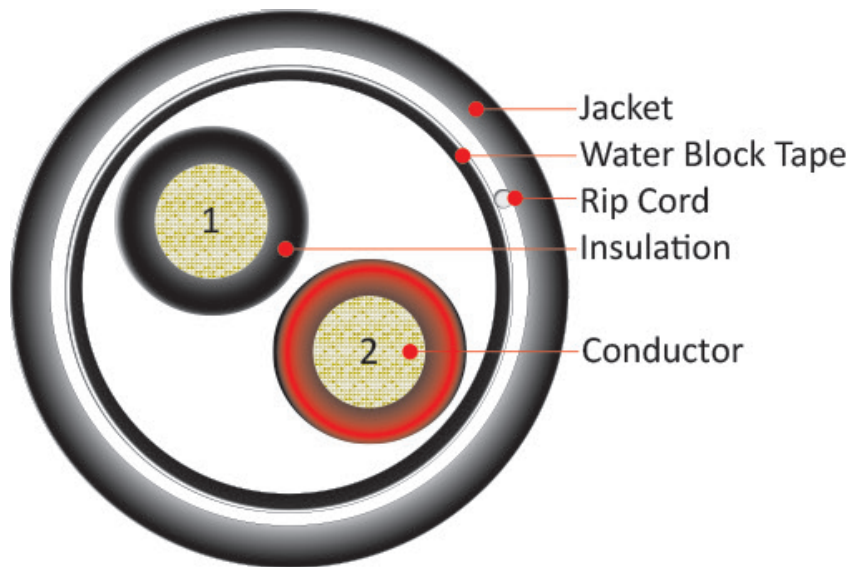

14-2C-DB

14AWG 2 CONDUCTOR AUDIO CABLE DIRECT BURIAL (105 STRAND)

HOME SUPPORT
866-839-9187

htsupport@metrahometheater.com

14-2C-DB

DESCRIPTION

14AWG, 2 Conductor, Direct Burial Cable. UV Rated Outer Jacket, Pull Box, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

Conductor - 2 Core (Stranded BC)

- Material: Oxygen Free Copper Wire Strands
- Size: 14AWG
- Stranding: 105 Strands
- Strand Diameter: 0.16 mm

Insulation

- Material: SRPVC
- Average Thickness: 0.36 mm
- Min. Point Thickness: 0.33 mm
- Diameter (± 0.05 mm): 2.60 mm

Water Block Tape Jacket

- Material: PE (UV)
- Color: Black
- Average Thickness: 0.95 mm
- Min. Point Thickness: 0.88 mm
- Outer Diameter (± 0.1 mm): 7.00 mm

Insulation Color

- Black, Red

Ripcord

- Material: Nylon (150D)

Electrical Performance

- Rated Temperature: $-20^{\circ}\text{C} - 75^{\circ}\text{C}$
- Rated Voltage: 300V
- Reference Standard: ETL Listed

Mechanical Characteristics

- Test Object: Jacket
- Test Material: PE
- Before: Tensile Strength (Mpa) ≥ 13.8
- Aging: Elongation (%) ≥ 100
- Aging Condition: ($^{\circ}\text{C} \times \text{hrs}$) 100x168
- After: Tensile Strength (Mpa) $\geq 85\%$ of unaged
- Aging: Elongation (%) $\geq 50\%$ of unaged
- Cold Bend: ($-20 \pm 2^{\circ}\text{C} \times 4\text{hrs}$) No Crack

Marking on Jacket

4003289 cETLus AUDIO CABLE 14 AWG
2 COND 105 STRANDED OXYGEN FREE
OUTDOOR UV DIRECT BURIAL RoHS XXXFT

HOME THEATER

www.MetraHomeTheater.com
1-866-839-9187 | 386-257-1186