


14AWG 4 CONDUCTOR AUDIO CABLE DIRECT BURIAL (105 STRAND)



14-4C-DB 14AWG 4 CONDUCTOR AUDIO CABLE DIRECT BURIAL (105 STRAND)

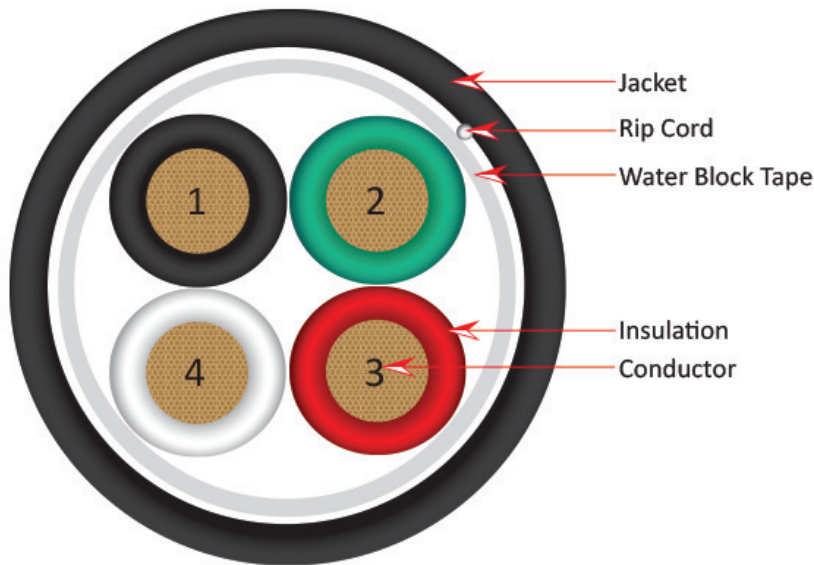

htsupport@metrahometheater.com

14-2C-DB

DESCRIPTION

14AWG, 4 Conductor, High Strand Audio Cable, (105 Strand), Direct Burial Cable, UV Rated Outer Jacket, Spool, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

Conductor - 4 Core (Stranded BC)

- Material: Oxygen Free Copper Wire Strands
- Size: 14AWG
- Stranding: 105 Strands
- Strand Diameter: 0.16 mm

Insulation

- Material: SRPVC
- Average Thickness: 0.36 mm
- Min. Point Thickness: 0.33 mm
- Diameter (0.05 mm): 2.60 mm

Water Block Tape Jacket

- Material: PE (UV)
- Color: Black
- Average Thickness: 0.95 mm
- Min. Point Thickness: 0.88 mm
- Outer Diameter (0.1 mm): 8.20 mm

Insulation Color

- Black, Red, Green, White

Ripcord

- Material: Nylon (150D)

Electrical Performance

- Rated Temperature: -20°C - 75°C
- Rated Voltage: 300V
- Reference Standard: ETL Listed

Mechanical Characteristics

- Test Object: Jacket
- Test Material: PE
- Before: Tensile Strength (Mpa) ≥ 13.8
- Aging: Elongation (%) ≥ 100
- Aging Condition: (°Cxhrs) 100x168
- After: Tensile Strength (Mpa) $\geq 85\%$ of unaged
- Aging: Elongation (%) $\geq 50\%$ of unaged
- Cold Bend: (-20 °C x4hrs) No Crack

Marking on Jacket

4003289 cETLus AUDIO CABLE 14 AWG
4 COND 105 STRANDED OXYGEN FREE
OUTDOOR UV DIRECT BURIAL RoHS XXXFT

HOME THEATER

www.MetraHomeTheater.com
1-866-839-9187 | 386-257-1186