




16-2C-BW-HD Speaker Cable 16 AWG 2C 65 Strands

Cross Section

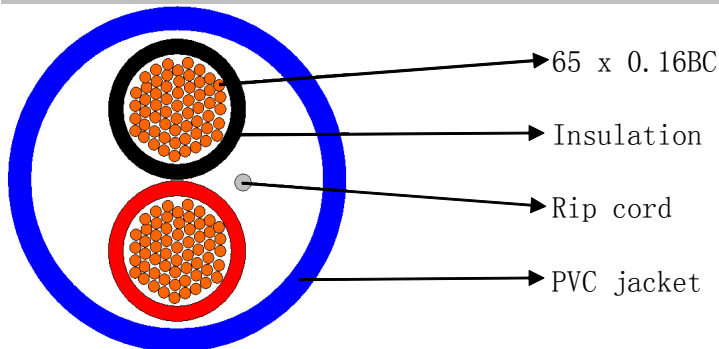

Application:

Multi-conductor-audio/sound, control & instrumentation

Construction:

2 core	Oxygen Free Copper Wire Strands
AWG	16 1.307mm.sq
Stranding (wire NO./wire dia. mm)	65/0.16

Insulation:

Material:	PVC
Thickness (mm):	0.25
Insulation Diameter (mm):	2
Color:	According to customer

Ripcord

Material:	Nylon (150D)
-----------	--------------

Jacket:

Material:	PVC
Nominal Thickness (mm)	1.50 +/- 0.05
Cable Dia. (mm)	6.3 +/- 0.1

Electrical Performance

Operation Temperature (degree):	75
Voltage Rating (V):	300

Mechanical Characteristics

Test Object:	Jacket
test Material:	PVC
Cold Bend (-20+/-2 X4hrs)	No crack

866.839.9187
Fax: 386.252.9399

Page 1 of 1



The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.