

PRODUCT SPECIFICATIONS

18-2C-1000-GRY

AUDIO CABLE

DESCRIPTION:

- Stranded bare copper conductors.
- PVC Insulation.
- Cabled conductors
- Flame retardant PVC Jacket
- Flammability : CMR

APPLICATION:


Connection in audio systems

OPERATING TEMPERATURE:

- 10°C to 75°C

MARKING:

CONDUMEX 2 COND 16 AWG TYPE CMR/CL3R/FPLR PER UL 444, UL 13, UL 1424 & NEC c(ETL)us CMR OR (ETL)us CL3R OR FPLR SUN RES 3164364 #####FT FECHA
--> GRABADO SECUENCIAL
FECHA --> MM/AA (MES/AÑO -MES EN INGLES. EJ: AUG/99-)

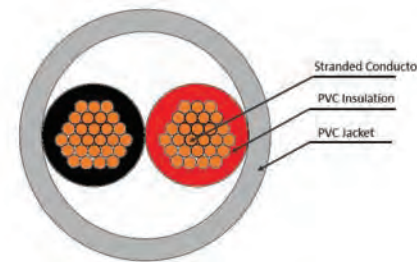

SPECIFICATIONS:

UL-13

CERTIFICATION:

Quality System ISO-9001.

MECHANICAL AND ELECTRICAL CHARACTERISTICS

Conductor
Material
No. of strands
Strand gauge
Conductor Diameter
Conductor gauge

MU	Nominal
	Bare copper
	26
AWG	30
mm	1.47
AWG	16

Insulation
Material
Insulation thickness
Insulation diameter
Color code

MU	Nominal
	PVC
mm	0.26
mm	1.99
	Black-red

Core
No. of conductors
Core assembly

MU	Nominal
	2
	Cabling

Jacket
Material
Color
Thickness
Diameter

MU	Nominal
	PVC
	Gray
mm	0.44
mm	4.66

Packaging
Material
Length
Cable weight
Packing weight

MU	Nominal
	Reel Box
ft	1000
Kg/Km	37.5
Kg	12.1

Electrical characteristics
Conductor resistance d.c.
Insulation resistance

MU	Nominal
Ohm/km	13.06
Mohms/Km	500

866.839.9187

The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.