

PRODUCT SPECIFICATIONS

22-2-SR-GR

SECURITY CABLE

DESCRIPTION:

- Stranded bare copper conductors.
- PVC Insulation.
- Cabled conductors
- Flame retardant PVC Jacket
- Flammability : CL2/CM

APPLICATION:


Connection in surveillance systems.

OPERATING TEMPERATURE:

- 10°C to 60°C

MARKING:

2 COND 22 AWG TYPE CM OR CL2 PER UL 444, UL 13, UL 1685 & NEC c(ETL)us CMG - CMX OUTDOOR OR (ETL)us CL2 SUN RES 3164364 #####FT FECHA A B C D E 1 2 3 4 5 6 7 8 9 0
--> GRABADO SECUENCIAL DE 2 EN 2 CADA 2 PIES,EJ:00000FT ..00002FT ...
FECHA --> mm/aa (MES/AÑO.MES EN INGLES. EJ: AUG/2006)

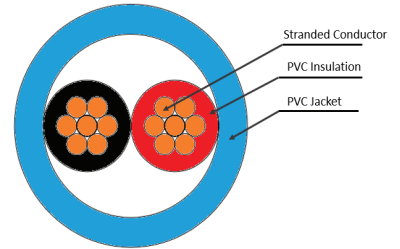

*Jacket color depends on part number, check color chart.

SPECIFICATIONS:

UL-13

CERTIFICATION:

Sistema de Calidad ISO-9001.

MECHANICAL AND ELECTRICAL CHARACTERISTICS

Conductor	MU	Nominal
Material	Bare copper	
No. of strands	7	
Strand gauge	AWG	30
Conductor Diameter	mm	0.74
Conductor gauge	AWG	22

Insulation	MU	Nominal
Material	PVC	
Insulation thickness	mm	0.16
Insulation diameter	mm	1.07
Color code	Black-red	

Core	MU	Nominal
No. of conductors	2	
Core assembly	Cabling	

Jacket	MU	Nominal
Material	PVC	
Color	Check color chart	
Thickness	mm	0.35
Diameter	mm	2.68

Packaging
Material
Length
Cable weight
Packing weight

MU	Nominal
Plastic bag	
ft	500
Kg/Km	11.2
Kg	1.8

Electrical characteristics
Conductor resistance d.c.
Insulation resistance

MU	Nominal
Ohm/km	52.55
Mohms/Km	500

Color Chart	
Part Number	Jacket Color
656050CM-11PAK/MTR	Blue
656050CM-91PAK/MTA	Orange
656050CM-31PAK/MTA	Gray
656050CM-81PAK/MTA	Green

866.839.9187

The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.