

PRODUCT SPECIFICATIONS

22-4-SD-GR

MULTICONDUCTOR CABLE

DESCRIPTION:

- Solid bare copper conductors.
- HDPE Insulation.
- Cabled conductors
- Flame retardant PVC Jacket
- Flammability : CM/CL2

APPLICATION:


Connection in interior telephone lines.

OPERATING TEMPERATURE:

- 10°C a 60°C

MARKING:

CONDUMEX 4 COND 22 AWG TYPE CMX OR CL2 PER UL 444, UL 13 & NEC c(ETL)us CMG - CMX OUTDOOR OR (ETL)us CL2 SUN RES 3164364 #####FT FECHA A B C D E 1 2 3 4 5 6 7 8 9 0
--> GRABADO SECUENCIAL DE 2 EN 2 CADA 2 PIES,EJ:00000FT ..00002FT ...
FECHA --> mm/aa (MES/AÑO.MES EN INGLES. EJ: AUG/2006)*/

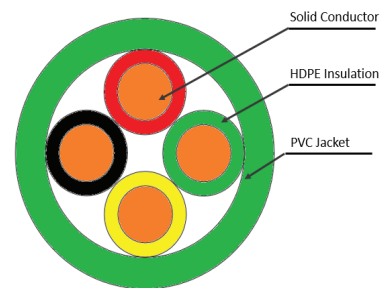

*Jacket color depends on part number, check color chart

SPECIFICATIONS:

UL-13

CERTIFICATION:

Quality System ISO-9001.

CARACTERÍSTICAS MECÁNICAS Y ELÉCTRICAS

Conductor	MU	Nominal
Material	Bare Copper	
No. of strands	1	
Conductor Diameter	mm	0.63
Conductor gauge	AWG	22

Insulation	MU	Nominal
Material	HDPE	
Insulation thickness	mm	0.16
Insulation diameter	mm	0.94
Color code	Red-green-yellow-black	

Core	MU	Nominal
No. of conductors	4	
Core assembly	Cabling	

Jacket	MU	Nominal
Material	PVC	
Color	Check color chart	
Thickness	mm	0.35
Diameter	mm	3.01

Packaging
Material
Length
Cable weight
Packing weight

MU	Nominal
Plastic bag	
ft	500
Kg/Km	16.9
Kg	2.7

Electrical characteristics
Conductor resistance d.c.
Insulation resistance

MU	Nominal
Ohm/km	56.06
MOhms/Km	2,400

Color Chart	
Part Number	Jacket Color
631724CM-81PAK/MTA	Green
631724CM-31PAK/MTA	Gray
631724CM-21PAK/MTA	White
631724CM-71PAK/MTA	Yellow

866.839.9187

The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.