
POWER OUTLET RELOCATOR Installation Instructions

AS-PWRLODBL

HELIOS BY AUDIO SOLUTIONS



POWER OUTLET RELOCATOR Installation Instructions continued

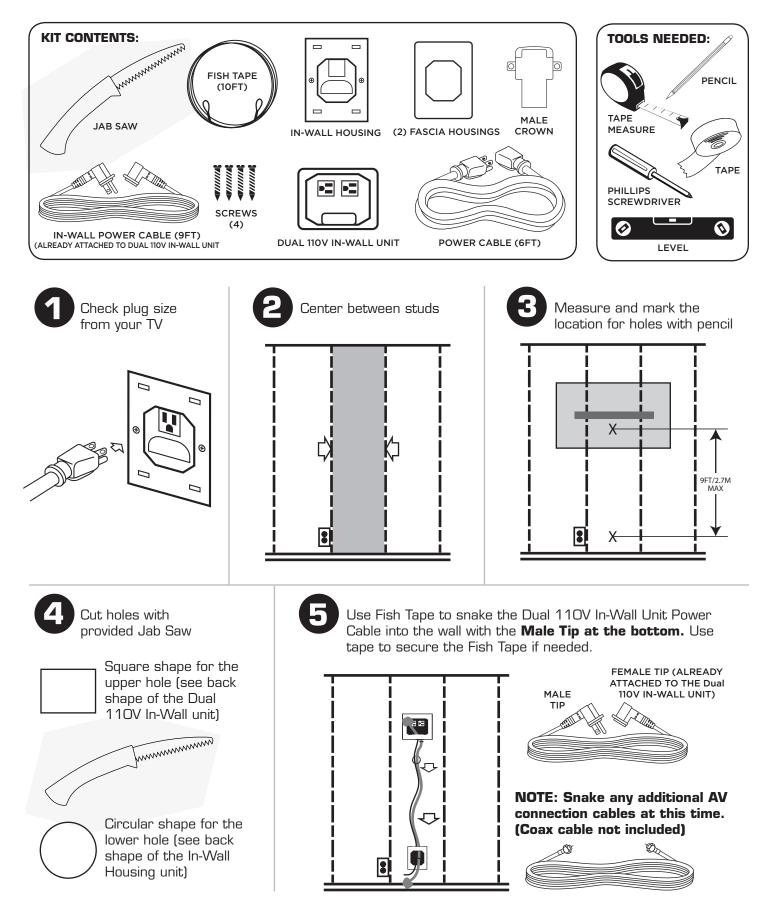


AS-PWRLODBL




At the bottom, insert Male Tip into the back side of the In-Wall Housing unit.



Snap on Male Crown over the Plug Tip and secure with screws.







9


8

Fold in Dog Ears and slide Housing into wall. Repeat at the bottom with the Male Housing.







Level and screw Dog Ears until Housing is secure. Repeat at the bottom with the Male Housing.



Snap Housing Fascia onto the front of the Housing. Repeat at the bottom with the Male Housing.


¢)





I

Plug Extension Cord into the bottom device. Installation is now complete.





Metra Electronics Corporation, 460 Walker Street, Holly Hill, FL 32117 www.MetraOnline.com ©2016 Metra Electronics Corp.