


POWER OUTLET RELOCATOR

Installation Instructions


CS-6X6PWR

HELIOS™
BY AUDIO SOLUTIONS


KIT CONTENTS:

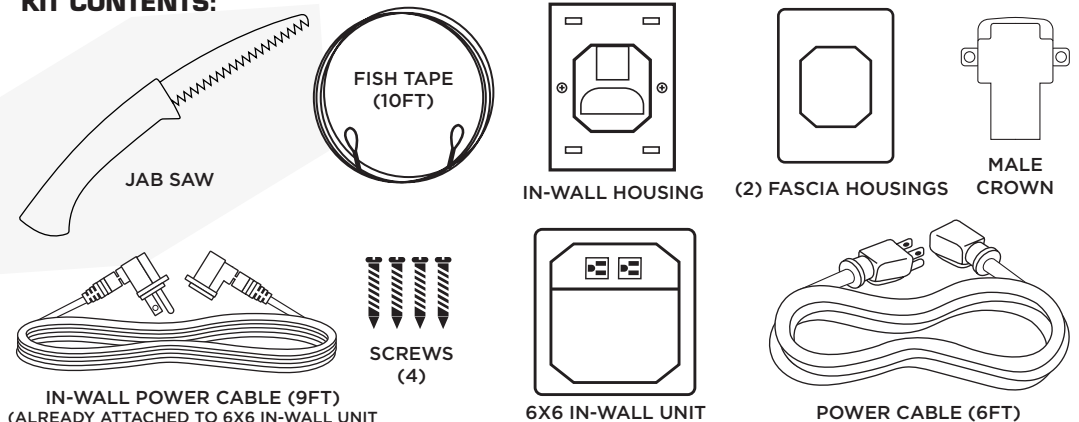


TOOLS NEEDED:

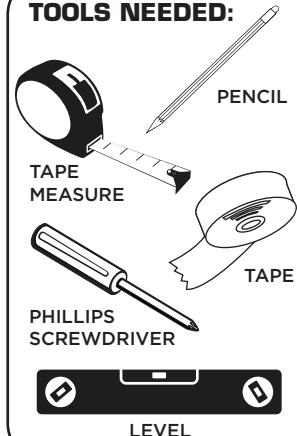


- 1** Check plug size from your TV

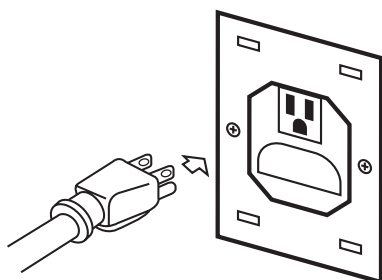

- 2** Center between studs

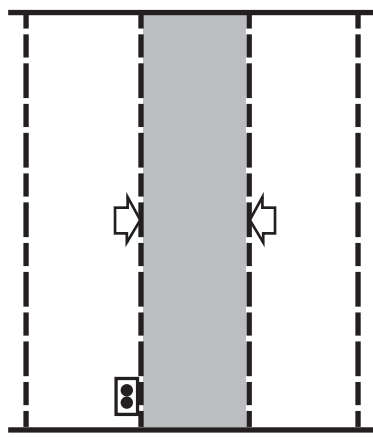


- 3** Measure and mark the location for holes with pencil

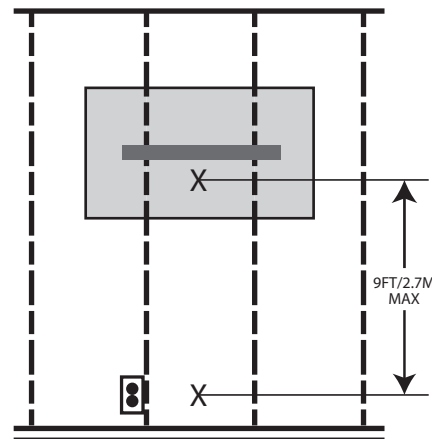



- 4** Cut holes with provided Jab Saw

Square shape for the upper hole (see back shape of the 6X6 In-Wall unit)

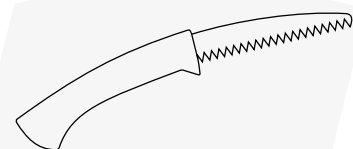


Circular shape for the lower hole (see back shape of the In-Wall Housing unit)

- 5** Use Fish Tape to snake the 6X6 In-Wall Unit Power Cable into the wall with the **Male Tip at the bottom**. Use tape to secure the Fish Tape if needed.

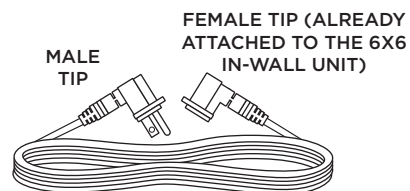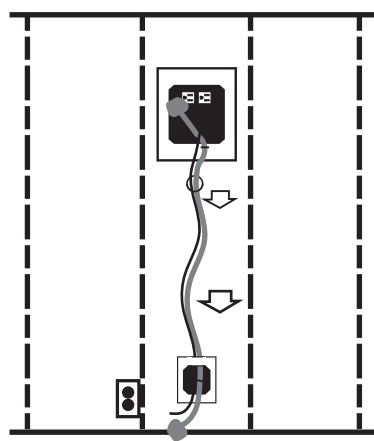

NOTE: Snake any additional AV connection cables at this time. (Coax cable not included)




POWER OUTLET RELOCATOR

Installation Instructions continued


CS-6X6PWR

HELIOS™
BY AUDIO SOLUTIONS


- 6** At the bottom, insert Male Tip into the back side of the In-Wall Housing unit.

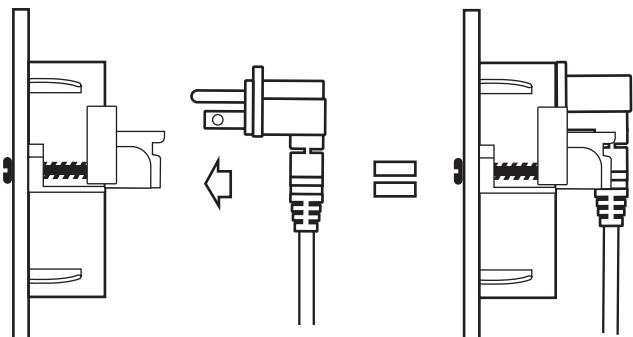


- 7** Snap on Male Crown over the Plug Tip and secure with screws.

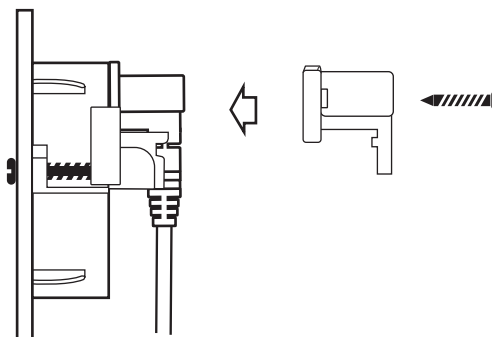


- 8** Fold in Dog Ears and slide Housing into wall. Repeat at the bottom with the Male Housing.

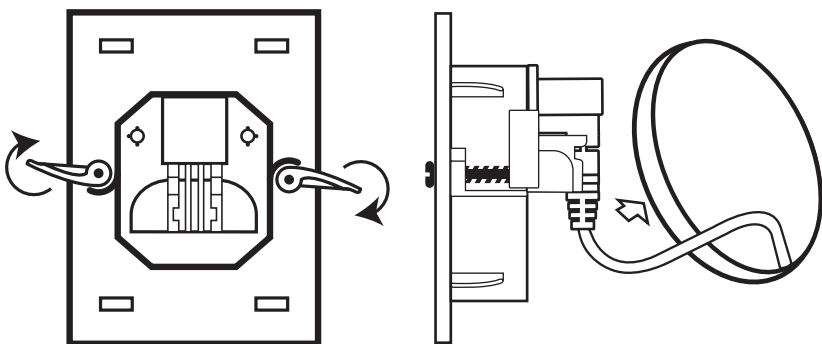

- 9** Level and screw Dog Ears until Housing is secure. Repeat at the bottom with the Male Housing.

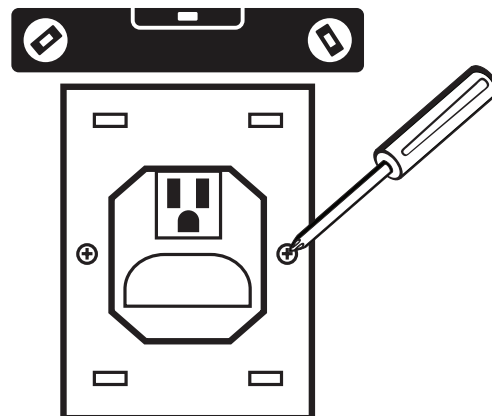

- 10** Snap Housing Fascia onto the front of the Housing. Repeat at the bottom with the Male Housing.

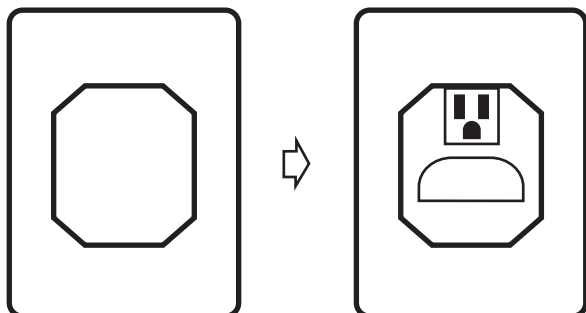

- 11** Plug Extension Cord into the bottom device. Installation is now complete.

